


MATERIALS:

1. CONCRETE: MIN. 4,000 psi @ 28 DAYS
2. ADAPTOR PLATE: SMC, TIER 15 RATED
3. BOLTS: 1/2"-13 x 3" SS304, TAMPER-RESISTANT
4. WASHERS: 1/2" SS304
5. THROUGH-BOLT HARDWARE FOR CHARGER CONNECTION: BY OTHERS

INSTALLATION:


EV BLOCKS SHALL BE INSTALLED PER THE CURRENT VERSION OF THE EV BLOCK INSTALLATION MANUAL AND PRODUCT SPECIFICATION.

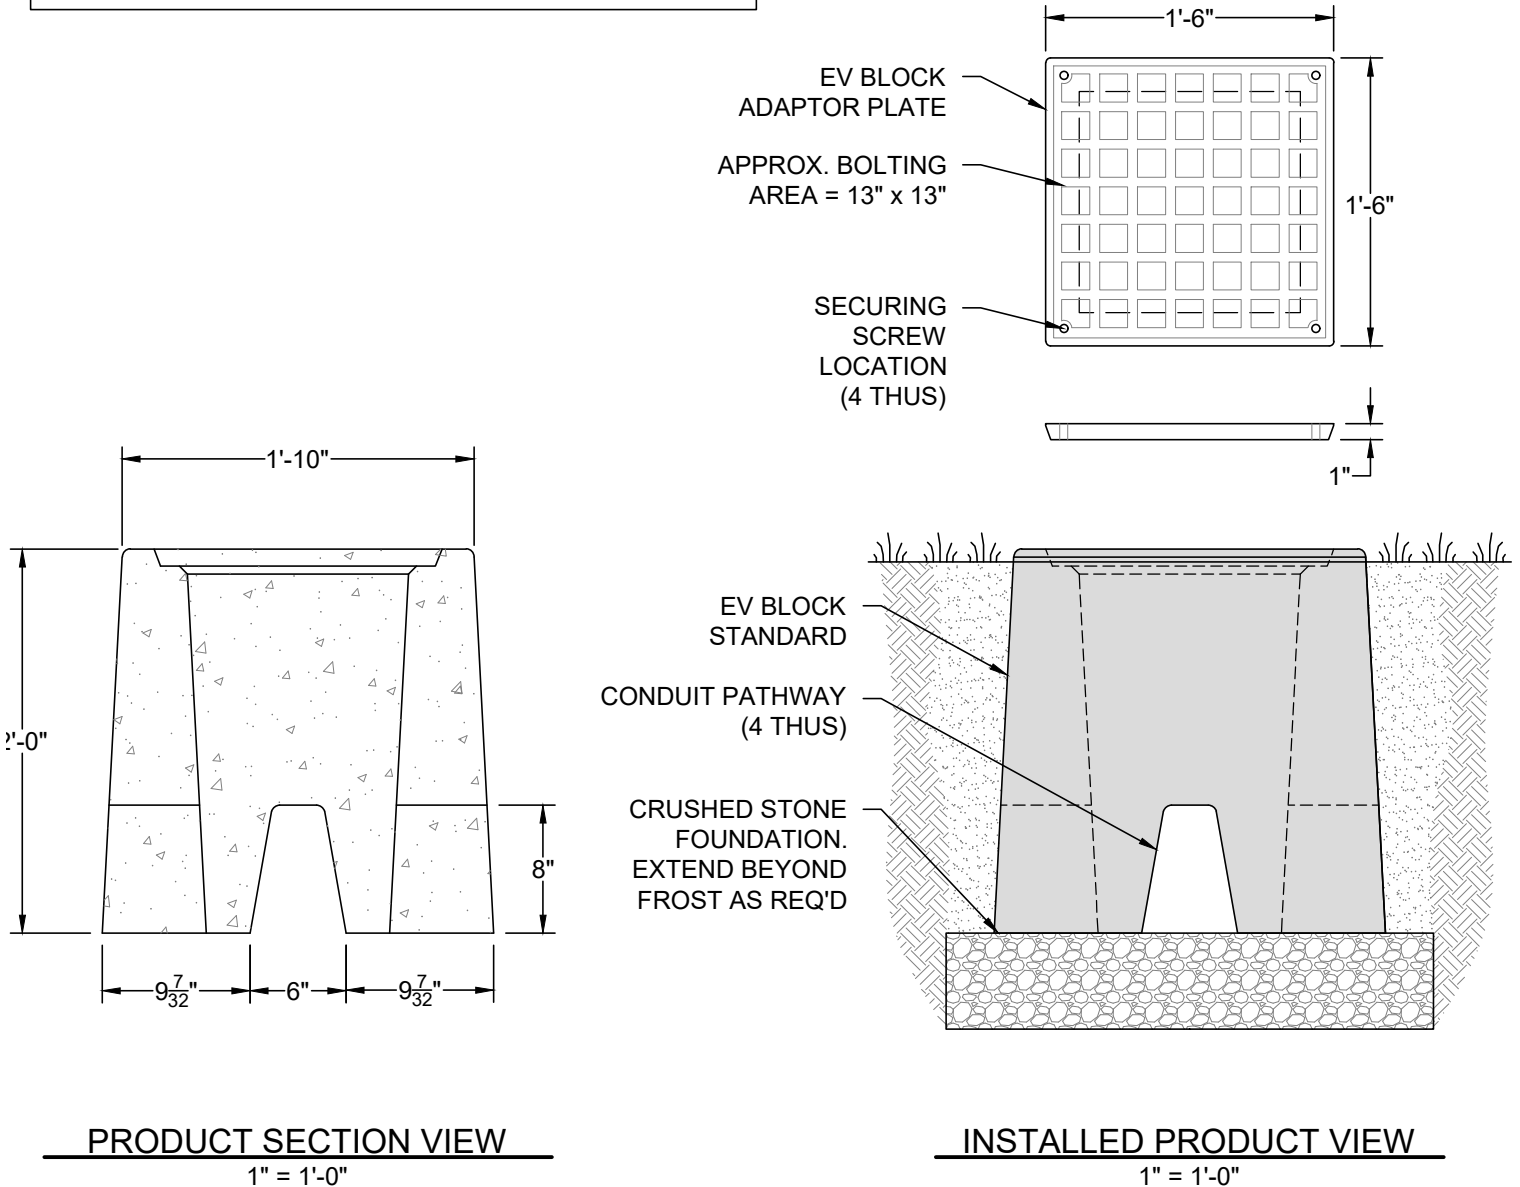

PRODUCT SECTION VIEW
1" = 1'-0"

INSTALLED PRODUCT VIEW
1" = 1'-0"

Disclaimer: This drawing has been prepared by EV Blocks, Ltd. and to the best of its knowledge, accurately represents the product use in the application that it is illustrated. Anyone making use of this drawing does so at their own risk and assumes all liability for such use. Final design for construction purposes must be completed by a Registered Professional Engineer who is familiar with the product and who has taken into account specific site conditions.



EV BLOCKS.COM

**EV BLOCK STANDARD
TYPICAL DETAIL**

EV BLOCKS - NORTH AMERICA
612.474.0089
evblocks.com/us

© Copyright 2023 EV Blocks, Ltd. All Rights Reserved